




SKILLED CRAFTERS OF METAL ROOFING SYSTEMS



QUIKMAX

1-1/2" SNAP-LOCK CLIP STANDING SEAM




BOLD LINES AND PERFORMANCE QUICK AS A FLASH

No mechanical seaming required on our 1-1/2" QuikMax snap-lock clip panel system making fast work of installation. The bold 7/16" thick continuous seam transitions created by this clip and hidden fastener system provide outstanding wind resistance and allow for wide fluctuations in surface temperatures that cause thermal movement. Ideal for residential and commercial applications, QuikMax is a favorite for those wanting strong roofing performance, ease of installation and beauty that stands out.

PRODUCT FEATURES

- Residential and commercial
- 1-1/2" snap-lock clip standing seam
- Bold 7/16-inch seam width
- Proven durability in light or heavy gauge options
- Concealed clips require no mechanical seaming
- Optional clip relief available
- Striated, pencil bead, ribbon bead or traditional flat seam available
- 40+ colors, custom available
- Custom lengths
- Free onsite production
- Warranties on materials and finishes up to 50 years

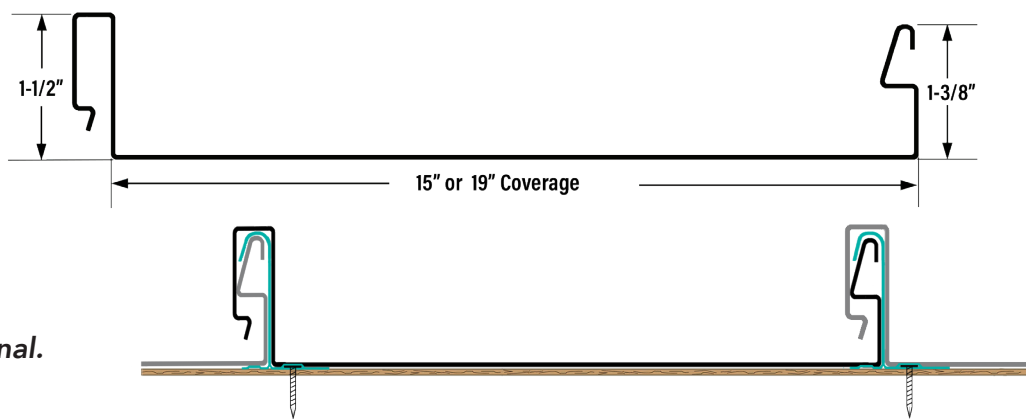

All dimensions are nominal.

PRODUCT TESTING

- **Uplift Resistance:** UL 580, UL 1897, TAS 110, TAS 125
- **Wind-Driven Rain:** TAS 100
- **Tensile Strength:** ASTM E8
- **Fire Rating:** UL 790
- **Accelerated Coating:** ASTM G152
- **Salt Spray Coating:** ASTM B117
- **Florida Building Code:** Approved HVHZ/Non-HVHZ

PRODUCT SPECIFICATIONS

- **Material:** 22 ga., 24 ga., or 26 ga. steel; .032 or .040 aluminum
- **Slope:** 2:12 or greater, site-specific also available
- **Support:** 15/32-inch or greater plywood or 3/4-inch minimum solid wood plank
- **Coverage:** 15 inches or 19 inches
- **Finish:** 70% PVDF (Kynar 500®), Tedlar® PVF film, mill-finished MaxAlúme
- **Sustainability:** LEED eligible†
- **Quality:** Keystone Quality Assurance Program

Images and drawings shown are for general illustrative purposes only and may not be an exact representation of the product. It is the responsibility of the building owner, contractor, installer, and design professional to determine applicable regulations, building codes, and accepted industry practices to verify the appropriateness of this product for a specific project. Oil canning is an inherent characteristic of light-gauge, cold-formed metal products and does not affect the integrity of panels. Talk to an EMF representative about striations, narrower panel widths and other options that can minimize oil canning.

833-EMF-ROOF EXTREMOMETALFABRICATORS.COM needmetal@emfab.net

